


MIRYU (Water Flow Checking Device)

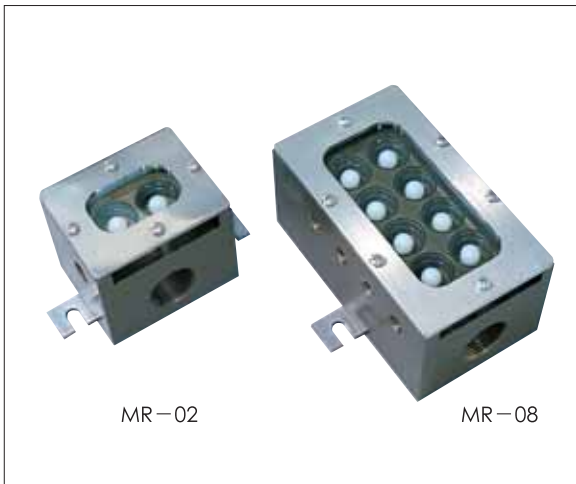

Use


This is a device to visually check the flow of die cooling water.

For Jet Cool System.

Characteristics

Water flow can be checked at a first sight.

- The front of the device is covered with reinforced acryl panel. When die cooling water flows, balls roll to show that water passes normally.

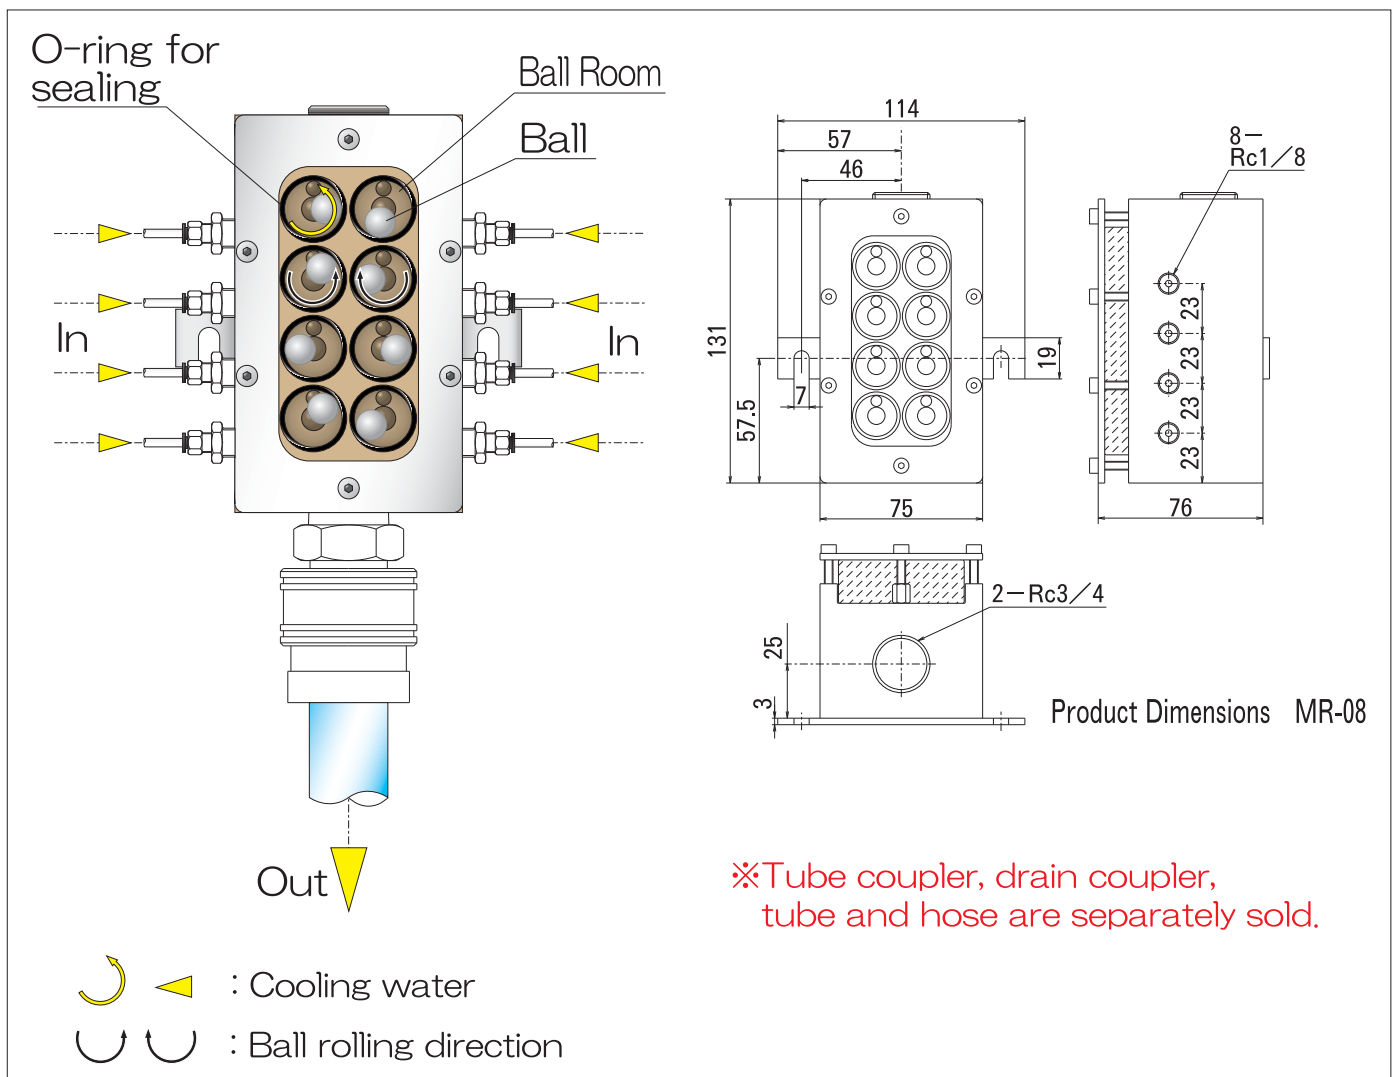

● Specification

Item \ Model	MR-02	MR-08
Dimension(mm)	H60xW75xD74	H131xW75xD76
Mass	Around 0.8kg	Around 1.7kg
Tube Connect Dia.	Discharge Port Dia. Rc3/4, Feed Port Dia. Rc1/8	
Number of Hoses	2 pcs	8pcs
Working Pressure	0.7MPa	
Breaking Pressure	2MPa	
Flow Rate that can be confirmed	8~30ml/sec	
Endurance Shot of Revolving Balls	About 800,000 shots	
Heat Resistance	100°C	
Mounting Attitude	30° horizontally, 5° back or forth	
Consumable	Nylon balls O-ring for sealing Acrylic board	

● Example of order code designation

Model

MR - 02

● Separately Sold / Consumables

Product Name	Model	Packing Unit	
 Tube Coupler	CO-4-01MOF	10pcs	
 Tube Coupler (Elbow Type)	CO-4-01MLOF	10pcs	
 Ball	MR-N	10pcs	
 O-ring for Sealing	MR-O	10pcs	
Acrylic Board	For MR-02	MR-A02	1pce
	For MR-08	MR-A08	1pce