

Open Type Cooling Manifold




● Use

Manifold facilitates connection / disconnection to / from the die at time of die change.

● Characteristics

- Each cooling water OUT port has an opening to check water flow condition.
- Connection can be made "one-touch" to the multitude of cooling ports.
- We have open type enabling water flow confirmation and simple centralized type.
- The number of connections by type is 10,15,20 and 24.
- It is made of stainless steel and aluminum and has a strong resistance against rust.
- Maximum working pressure is 0.5 MPa (for cooling water OUT)
Please refer about other pressure.

Open Type Cooling Manifold

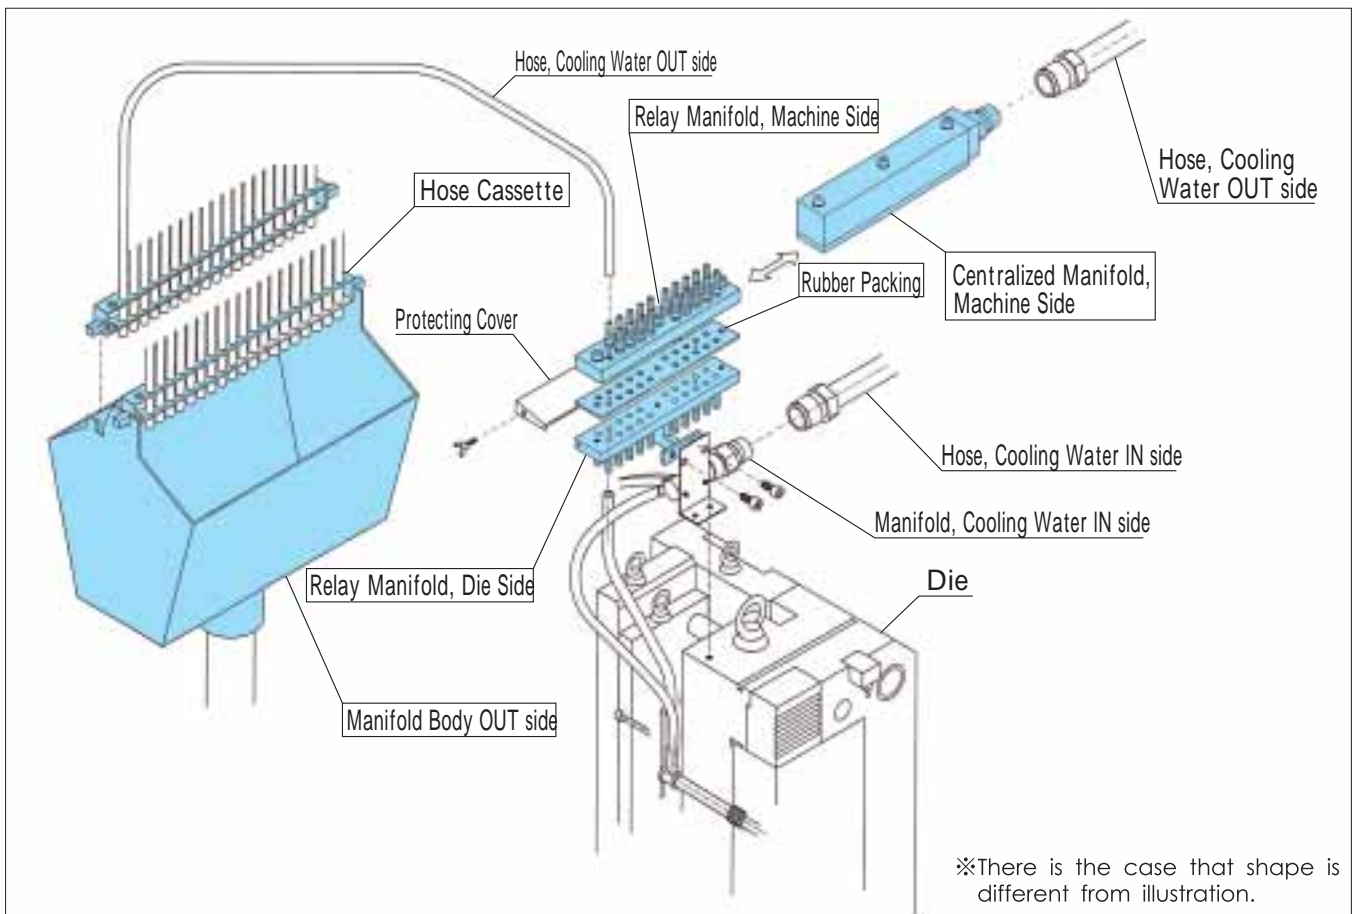

● Component

OCM	Name	Type	Number of Connection		
①	Relay Manifold, Die Side	DM	10		
			15		
			20		
			24		
	②	Relay Manifold, Die Side	MM	10	
				15	
				20	
				24	
	③	Hose Cassette	HC	10	
				15	
				20	
				24	
④	Manifold Body, Out Side	MH	10		
			15		
			20		
			24		
⑤	Centralized Manifold, Die Side	MP	10		
			15		
			20		
			24		
⑥	Rubber Packing	OCM GP	※		

※You can cut it depending on number of connection

● Example of order code designation

Please contact us if there is any question.